

BRM600HD



PORT & QUARRY SUPPLIES LTD
Manufactured in England by Ore Sizer (UK) Ltd

Specifications

Feed Opening

650mm x 215mm situated above the rotor so that material is pre-crushed against the top stator bar. Feed extends over the full width of the rotor

Rotor

10mm HFS tube 406mm diameter with fixing angles for breaker bars. Suitably webbed and strengthened

Breaker Bars

Cast manganese steel or machined special steel, all reversible to give two wearing edges. Six bars fastened to rotor and two on stator.

Stator

Spring loaded with set screw adjustment for size of crushed product. On standard model the adjustment is from 3mm to 30mm approx.

Shaft and Bearings

50mm diameter shaft running in grease-packed, self-aligning flange mounted roller bearings

Pulley

250mm, 4xV-belt pulley. Can be fitted either side, fully guarded

Drive

Standard units are powered by electric motor through guarded V-belt drive. Diesel drive through a clutch can also be specified.

Casing

Constructed of 10mm M5 renewable sections with removable top cover plate for easy access to breaker bars, stator bars and rotor for maintenance

General

The crusher is mounted on 100mm x 50mm channel frame which also incorporates the power unit mounting.

Options

The feed hopper and supporting base to suit your installation. Lining plates, extended shaft etc. can also be specified.



Dimensions

Length	Width	Height	Weight
1,450mm	1,030mm	820mm	1,015kg

Capacity

Capacity	Up to 38 cubic metres per hour
Feed Size	Maximum 100mm lump size
Product Size	From -10mm to -60mm

Port & Quarry Supplies Ltd
6 Moira Road
Ashby de la Zouch
Leicestershire
LE65 2GA
T: +44 (0) 1530 414358
F: +44 (0) 1530 414166
E: sales@pqqs.uk.net
W: www.pqqs.uk.net

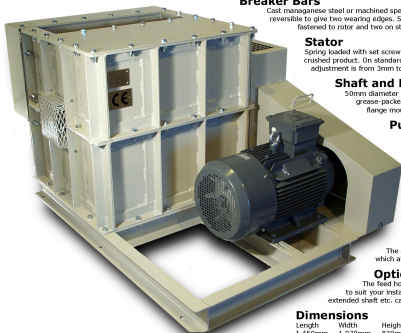

**REUSE
REDUCE
RECYCLE**

